

# Operating Instructions

## “ OCL(B)3 “

### (3 codes, 3 relays)

Using **OCL(B)3** (3 codes, 3 relays),  
you can drive 3 different relay outputs (potential-free) over 3 opening codes.

#### Teaching-in the Codes

**Code 1 (relay 1):** Set **DIP switch 1** to "ON", enter a one to six digit access code on the key pad, then depress key "P". Afterward, set the **DIP switch** back to position "OFF". Any key entry is confirmed by a short flickering of the **function LED**. Storage of the access key is confirmed by extended lighting of the **function LED** as well as the **program LED** on the logic board.

Code 2 (relay 2): Set **DIP switch 2** to "ON", etc.  
Code 3 (relay 3): Set **DIP switch 3 +4** to "ON", etc.

#### Entering the Access Code

Enter the stored access code on the key pad and confirm with the bell key. The respective output relay will energize for approx. **3 sec.** provided the access code was correct. The correct access code is acknowledged by simultaneous lighting of the **function LED** as well as the **program LED** on the logic board. Wrong entry is signaled by **5 x** short flashing of the **function LED** if you entered a wrong access code.

#### Repeat Function

You can re-activate the output relay within **20sec.** for another **3sec.** by pressing any key after the **output relay** has switched off.



There will be no repeat function in case you did not press any key **20 sec.** after the **output relay** was de-energized

The time for the repeat function can be aborted by pressing the "bell" key.

# Technische Daten

## Technical Data

### Caracteristiques Techniques

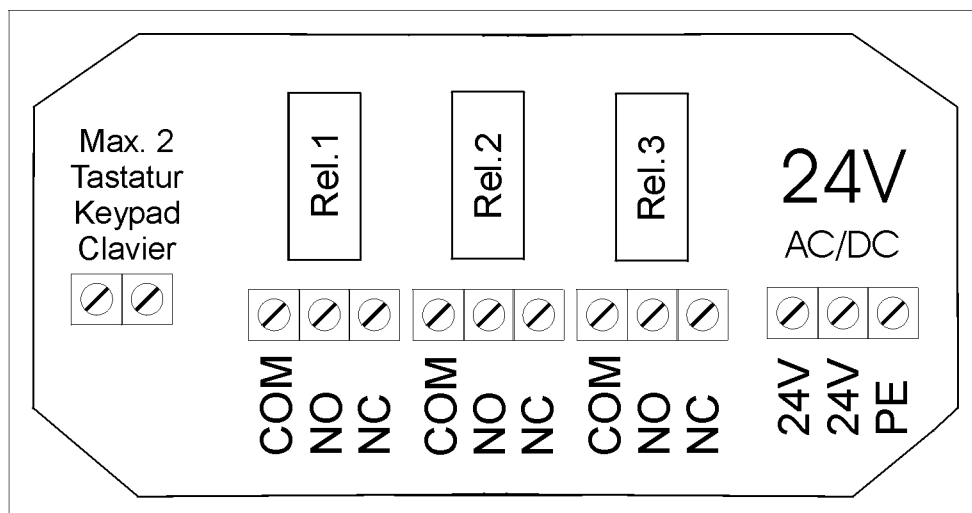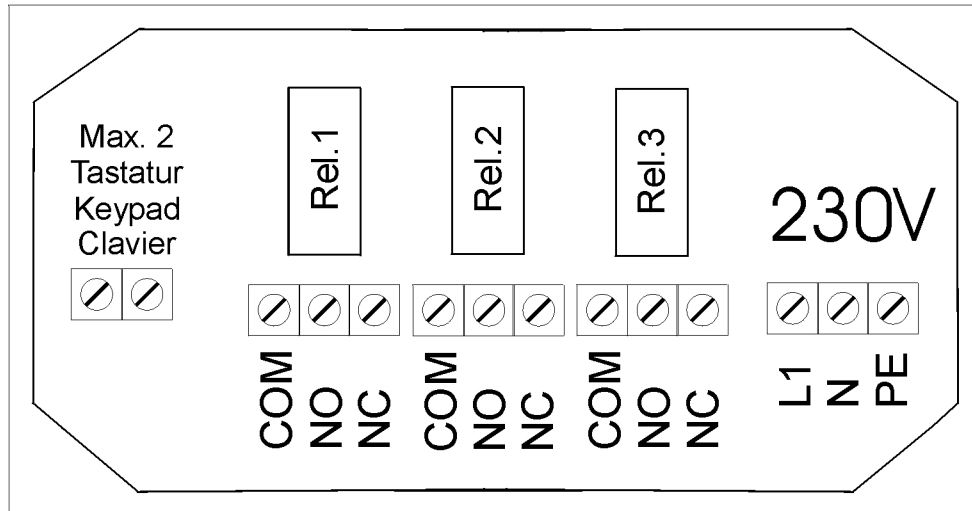

Spannungsversorgung / Power / Alimentation

230V-AC

24V AC/DC

- 3 potentialfreier Relaisausgang max. 8A/250V
- 3 potential-free relay output max. 8A/250V
- 3 sortie de relais potentiel de max. 8A/250V
- 3 Öffnungscode (max. 6 - stellige Codezahl)
- 3 access-code (max. 6 digit)
- 3 codes d'ouverture de max. 6 chiffres