

# Operating Instructions

## “ OCL(B)1 “

### (4 codes, 1 relays)

With the **OCL(B)1** Keypad 4 access-codes can be stored in the memory as opening codes. All 4 codes affect to the output-relay. The contact of the output-relay is potential free implemented.

#### Teaching-in the Codes

Set one **DIP switch 1, 2, 3, 4** to "ON", enter a one to six digit access- code on the key pad, then depress key "P". Afterward, set the **DIP switch** back to position "OFF". Any key entry is confirmed by a short flickering of the **function LED**. Storage of the acceptance key is confirmed by extended lighting of the **function LED** as well as the **program LED** on the logic board.

#### Entering the Access Code

Enter the stored access code on the key pad and confirm with the **bell** key. The respective output relay will energize for approx. **3sec.** provided the access-code was correct. The correct acceptance code is acknowledged by simultaneous lighting of the **function LED** as well as the **program LED** on the logic board.

Wrong entry is signaled by **5 x** short flashing of the **function LED** if you entered a wrong access code.

#### Repeat Function

You can re-activate the output relay within **20sec.** for another **3sec.** by pressing any key after the **output relay** has switched off.



There will be no repeat function in case you did not press any key **20 sec.** after the **output relay** was de-energized

The time for the repeat function can be aborted by pressing the "bell" key.

# Technische Daten

## Technical Data

## Caracteristiques Techniques

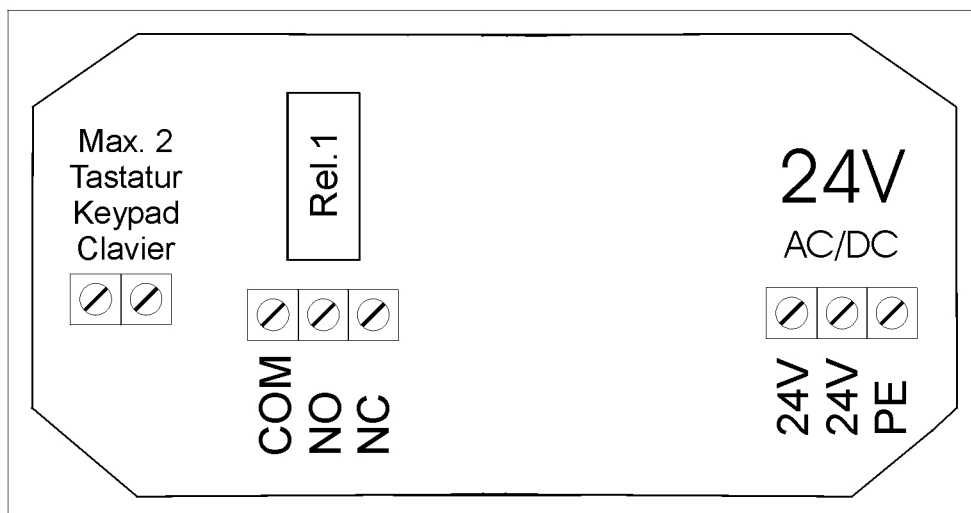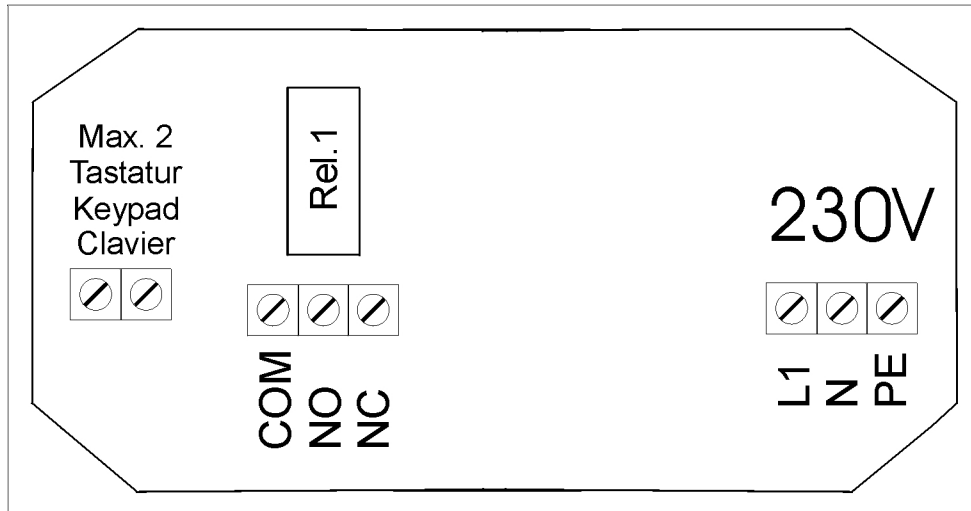

Spannungsversorgung / Power / Alimentation

230V-AC

24V AC/DC

- 1 potentialfreier Relaisausgang max. 8A/250V
- 1 potential-free relay output max. 8A/250V
- 1 sortie de relais potentiel de max. 8A/250V
- 4 Öffnungscode (max. 6 - stellige Codezahl)
- 4 access-code (max. 6 digit)
- 4 codes d'ouverture de max. 6 chiffres